

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Luca Bessoni

**Supplier's address:** Importabteilung, Römerstraße 39, 4600 Wels, AT

**Model identifier:** 82272065

## Type of light source:

|                                                     |            |                                 |      |
|-----------------------------------------------------|------------|---------------------------------|------|
| Lighting technology used:                           | LED        | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | LED Module |                                 |      |
| Mains or non-mains:                                 | MLS        | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No         | Envelope:                       | -    |
| High luminance light source:                        | No         |                                 |      |
| Anti-glare shield:                                  | No         | Dimmable:                       | No   |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|


### General product parameters:

|                                                                                                                                                |                        |                                                                                                                                                            |                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 24                     | Energy efficiency class                                                                                                                                    | E                                                                       |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 2 900 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                                                                   |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 24,0                   | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                                                                    |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                                                                      |
| Outer dimensions without separate control gear, lighting control                                                                               | Height                 | 1                                                                                                                                                          | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|                                                                                                                                                | Width                  | 2 700                                                                                                                                                      |                                                                         |
|                                                                                                                                                | Depth                  | 10                                                                                                                                                         |                                                                         |
|                                                                                                                                                |                        |                                                                                                                                                            | See image in last page                                                  |

|                                                                                                                         |      |                                       |                |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                       |                |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,440<br>0,403 |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |
| R9 colour rendering index value                                                                                         | 6    | Survival factor                       | 1,00           |
| the lumen maintenance factor                                                                                            | 0,96 |                                       |                |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90 | Colour consistency in McAdam ellipses | 3              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |
| Flicker metric (Pst LM)                                                                                                 | 0,2  | Stroboscopic effect metric (SVM)      | 0,1            |

(a)-: not applicable;

(b)-: not applicable;

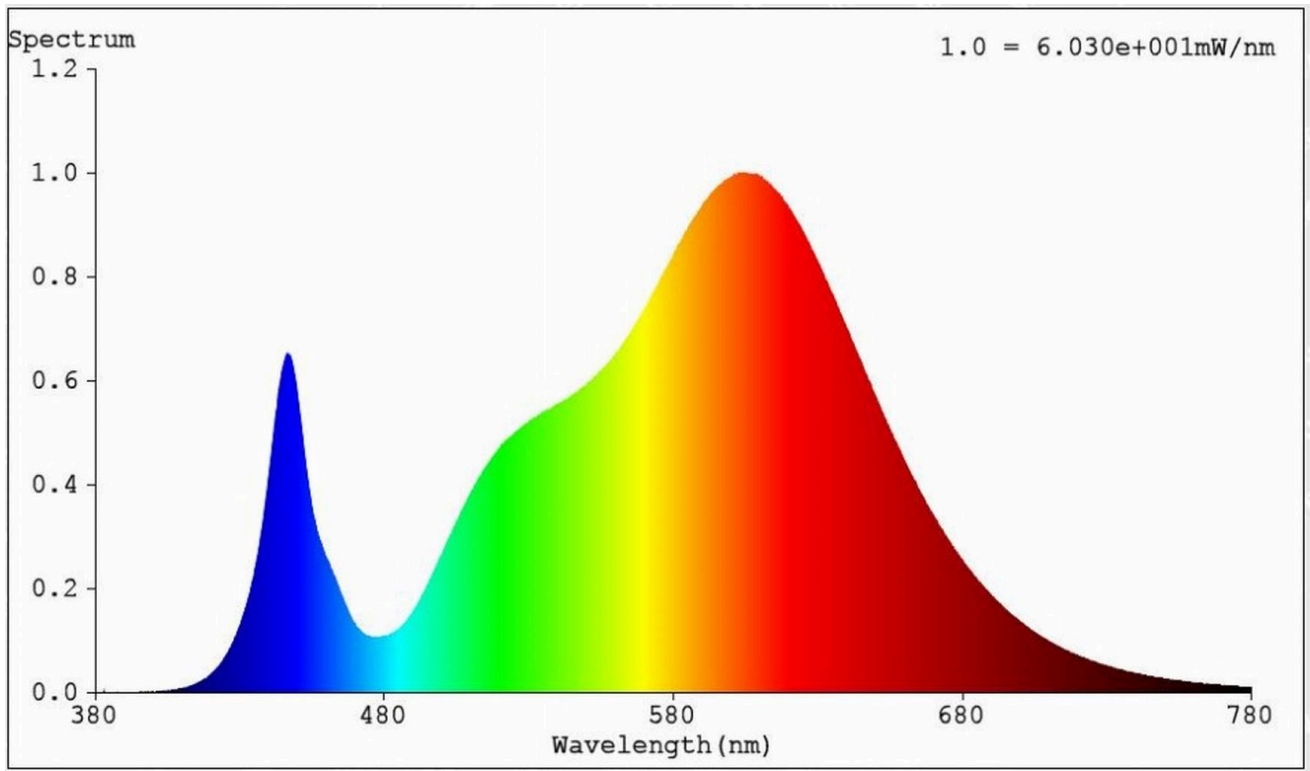

**EPREL registration number:** 2707786

Model placed on the Union market from 18/05/2026.



<https://eprel.ec.europa.eu/qr/2707786>

**Supplier:** MX Logistika SL, spol. s r.o. (Importer)

**Website:**

**Customer care service:**

**Name:** Importabteilung

**Website:**

**Email:** [EPREL-info@xxlgroup.com](mailto:EPREL-info@xxlgroup.com)

**Phone:** +43/(0)50/111 500949

**Address:**

Römerstraße 39  
4600 Wels  
Austria